

MINI DREDGES DRF SERIES

Remote Control Dredging Solutions



ultra-small dimensions



simple to assemble




small draught clearance



versatile and customisable

DRAGFLOW
ULTIMATE EFFICIENCY

MINI DREDGES DRF SERIES

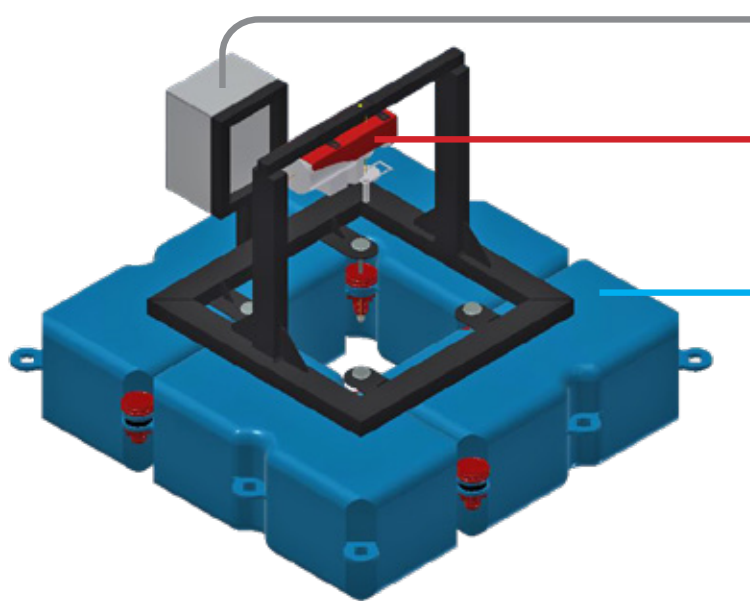

Electrical panel

Electric winch

- To move the pump with precision.

Floating polyethylene cubes


- They guarantee stability thanks to a floatation capacity of 350 kg/m².

Wired control

- To Manage the Pump.
- Emergency stop.



DRF30



DIMENSIONS


Length	2 m
Width	2 m
Height	1,5 m
Weight	550 kg (pump included)

Winch	max 300 kg
Cable length	10 m
Wired control	30 m

PUMP RANGES

- EL5
- EL7,5 • EL7,5 S • EL7,5 SS
- EL10 • EL10 S • EL10 SS
- EL12,5 • EL12,5 S • EL12,5 SS

DRF50

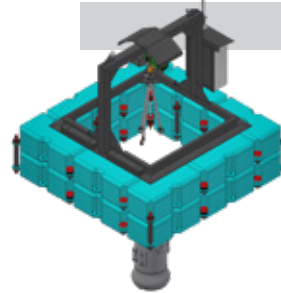

DIMENSIONS


Length	2,5 m
Width	2,5 m
Height	2,3 m
Weight	1300 kg (pump included)

Winch	max 560 kg
Cable length	10 m
Wired control	30 m

PUMP RANGES

- EL20 • EL20 S • EL20 SS

DRF80



DIMENSIONS


Length	3,5 m
Width	3,5 m
Height	2,6 m
Weight	1600 kg (pump included)

Winch	max 800 kg
Cable length	10 m
Wired control	30 m

PUMP RANGES

- EL25 • EL25 S
- EL35 • EL35 HC
- EL354

DRF100



DIMENSIONS

Length	4 m
Width	3,5 m
Height	3,7 m
Weight	2660 kg (pump included)

Winch	max 2000 kg
Cable length	10 m
Wired control	30 m

PUMP RANGES

- EL35 S
- EL60
- EL354 S
- EL1204 HC