
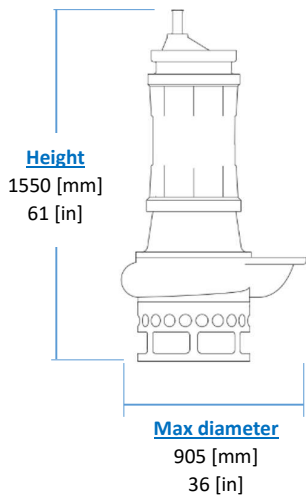
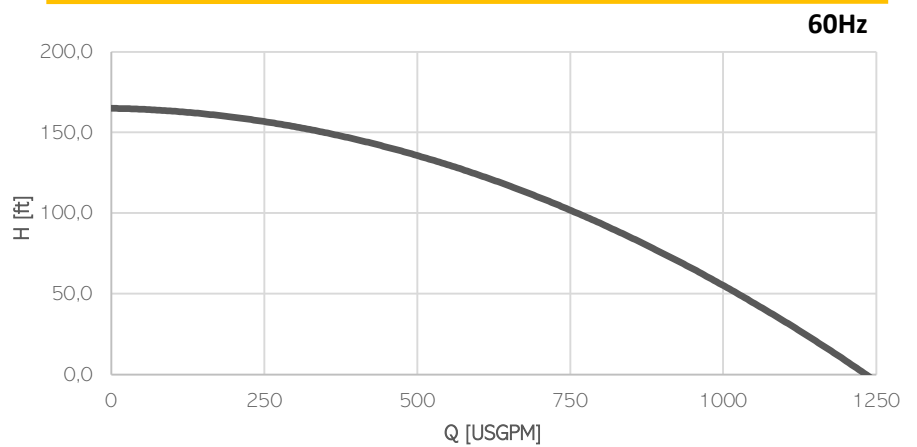


ELECTRIC PUMP EL354

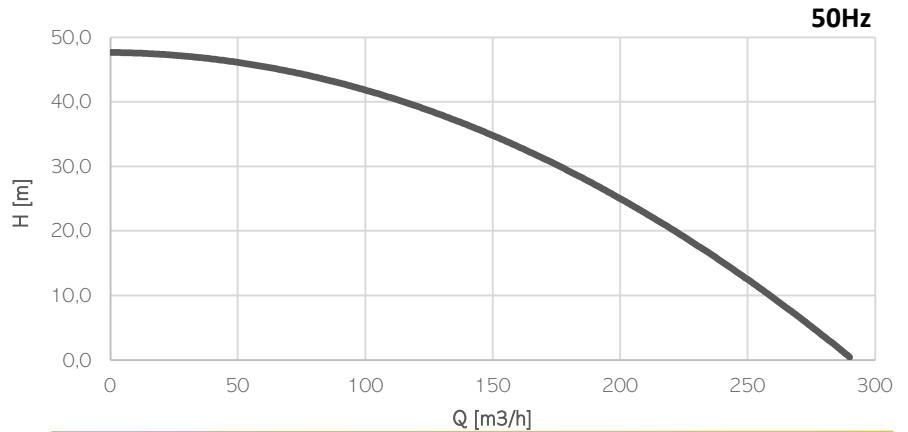

KG
Weight
(without cable)
780 [kg]
1580 [lb]

Electrical motor

Insulation class H

Cable

1 x H07RN-F 4G16 length 20m

Operating Conditions

- Max liquid temperature 35°C
- Min Submersion depth 1240 mm

Model	EL354	
Brake Power [kW HP]	37 49	
Electric Power [kW HP]	40 53	
Frequency [Hz]	50	60
Efficiency [%]	48%	44%
Number of Poles	4	4
RPM	1465	1758
Voltage [V]	400	460
Rated Current [A]	70	60
Solid handling [mm in]	35 1.4	
Discharge [DN-PN]	100-10	

Materials

Part	Standard
Casing	Cast Iron EN-GJS800
Body	Cast Iron EN-GIL250
Wear Parts	High chrome EN-GJN-HV600 (CH6)
Minimum hardness [HB]	550
Main shaft	High tensile 39NiCrMo3
PH Range	5-10

Seals and lubricants

Version	EL354	MG	MS
Motor Side	LIPS	MECHANICAL	MECHANICAL
Impeller Side	LIPS	LIPS	MECHANICAL
Oil type	EP320	ISO32	ISO32